


# Solo

## WALL MOUNT SINGLE BIKE RACK


### 1 Determine Mounting Height

- Stand your longest bike on its rear tire with both tires against wall.
- Mark wall where front tire touches wall.
- Wheel hook must be installed 8" or more above the front tire mark on wall to allow rear tire to clear ground.

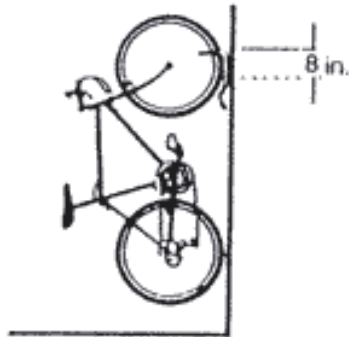


### 2 Install Mounting Hardware

- Wood screws are the preferred mounting hardware. Both wood screws *must* be screwed into vertical stud inside the wall.
- Mark holes through rack mounting plate and drill 1/8" pilot holes. Install screws into vertical stud. Tighten firmly.

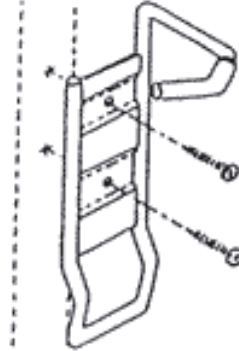


### 3 Attach Cover Plate

- Hang cover on top edge of rack mounting plate.
- Push cover bottom firmly, snap into place.

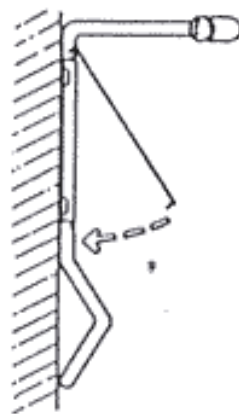

### 4 Security "Lock-Loops"

- Your cable lock may be used to secure bike frame to rack.

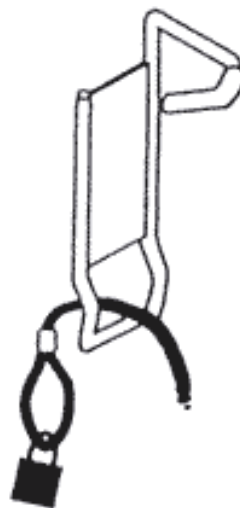

Important: Weight limit not to exceed 80 lbs.

CUSTOMER SERVICE 1-800-783-7725

**racor**

RACOR, INC.  
4100 McGhee Road