





## Mounting Instructions

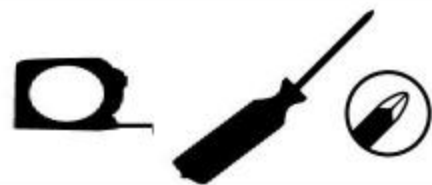

Remove white cover plate from base to attach InterChange™ WallDock to a wall stud with provided screws. If you are mounting multiple WallDocks and racks you will need to pre-plan your wall so you will be able to rotate racks and gear as the seasons change or when you feel necessary.

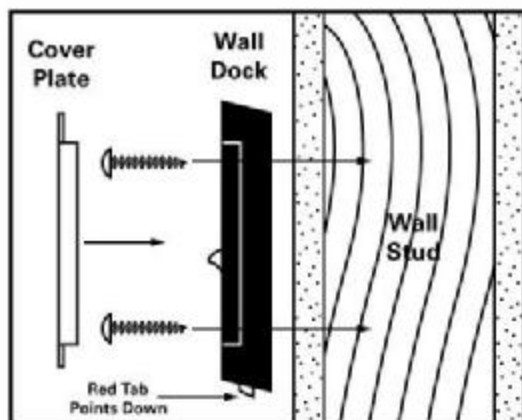

**Tip:** For easiest installation, pre-drill 1/8" pilot holes before screwing WallDock to stud.

Remember there may be certain times of year that you are not using items, so consider putting them up high out of the way and bring items that you will be using more frequently down low within easy reach.

If you choose to attach the WallDock on to a hollow wall, purchase anchors separately and install according to manufacturer instructions.

**Attaching the cover plate:** Once the WallDock is attached to the wall, attach the cover plate.



**Attaching racks to the WallDock:** Slightly tilt the top portion of the rack toward the wall and slide over WallDock. Press the bottom portion against the wall, insuring that the red tab snaps over the bottom of the rack.

**Removing a rack from the WallDock:** Push red button up and remove rack.

### Troubleshooting

Red tab doesn't snap over the rack- This typically happens when the WallDock is attached over drywall. The WallDock recesses into the drywall because the screws have been overtightened. Simply loosen the screws a bit.

Screws pull out of the wall when gear is loaded on the rack - The WallDock is not attached to the stud. Remove the WallDock and attach to a stud.

**Weight Limit not to exceed 50 Lbs. when mounted into a wooden stud.**

**Need Assistance?** 1-800-783-7725  
CALL TOLL FREE: M-F 8AM-6PM PACIFIC TIME

[www.racorinc.com](http://www.racorinc.com)

© 2004 Racor Inc.  
The InterChange™ logo is a trademark of Racor Inc.  
Protected by US Patent